

Test Date: April 08, 2026

2020 GRIMSØY 26

One (1) Seakeeper 2 was installed on a Grimsøy 26 to provide roll stabilization at anchor and underway. This report summarizes the results of tests conducted by Sea-Tek As in Grimsø, Aust-Agder, Norway, on April 08, 2026, to measure the performance of the Seakeeper system at zero speed in beam seas.



RESULT: 94% ROLL REDUCTION

In the sea conditions listed below, the Seakeeper 2 eliminated 94% of roll at the vessel's natural roll period.

BOAT SPECIFICATIONS

Length Overall	7.96 m / 26.12 ft
Beam Overall	2.65 m / 8.69 ft
Displacement	3,500 kgs / 7,716 lbs
Natural Roll Period	3.21 seconds

SEAKEEPER CONFIGURATION


Seakeeper Model	Seakeeper 2
Angular Momentum	2,000 N-M-S
Weight	188 kg / 414 lbs
Dimension	0.63 L x 0.65 W x 0.51 H (meters)

TEST CONDITIONS (PROVIDED BY BUOYWEATHER)

Calm seas	
Wind	E 10 knots
Sea	SW 0.1 m at 4 seconds

PERFORMANCE DATA

Seakeeper On Seakeeper Off

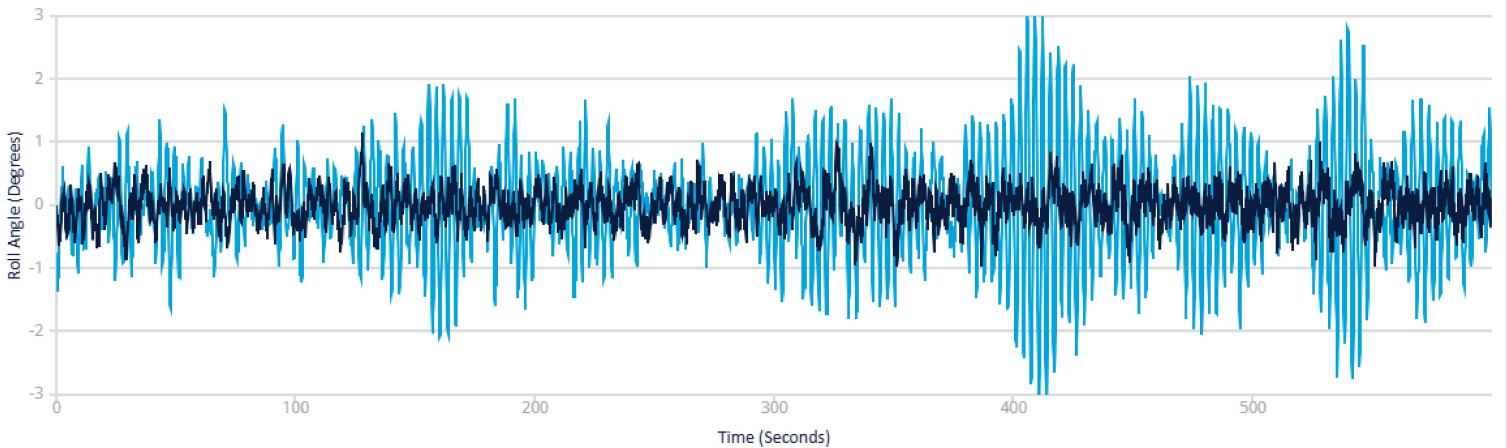

94% ROLL REDUCTION